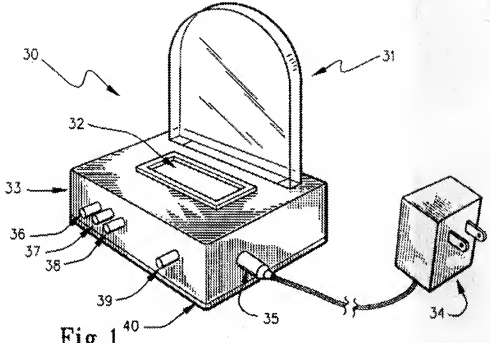

Fig.1

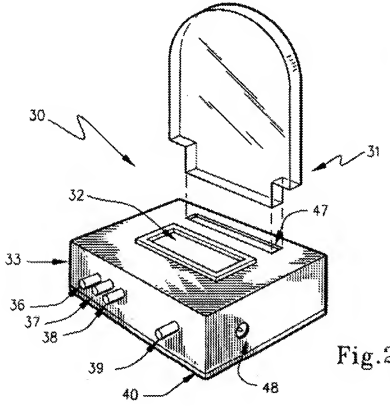

Fig.2

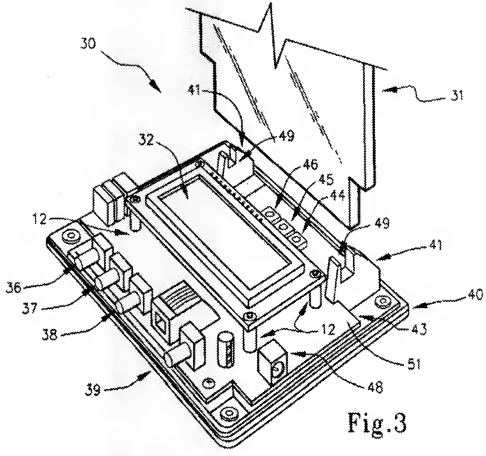

Fig.3



Fig.5

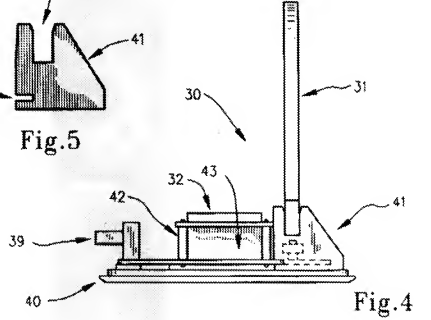

Fig.4

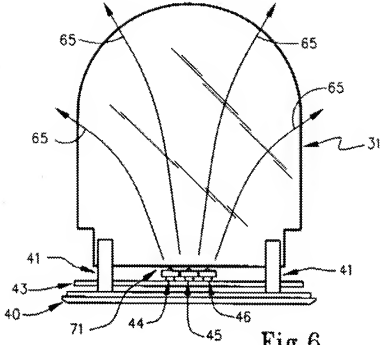
65
65
65
65
31
41
41
43
40
71
44
45
46

Fig.6

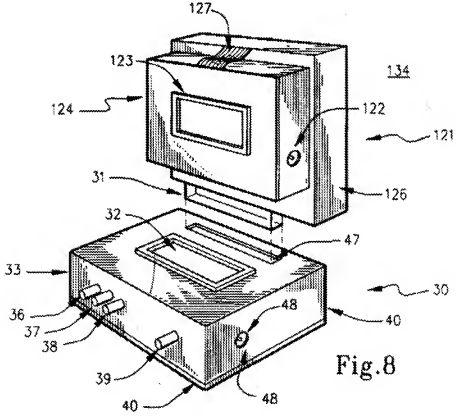
127
123
134
124
122
121
31
126
32
47
33
30
36
48
37
40
38
39
48
40

Fig.8

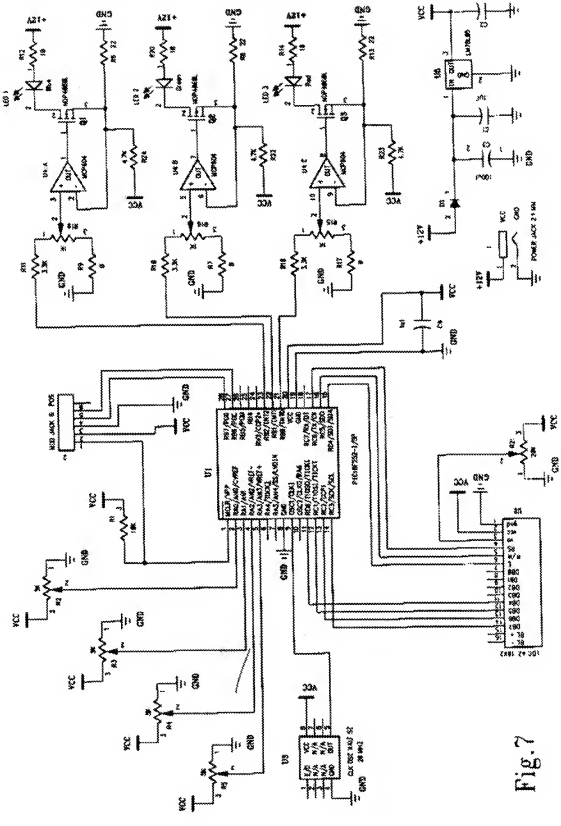

Fig.7

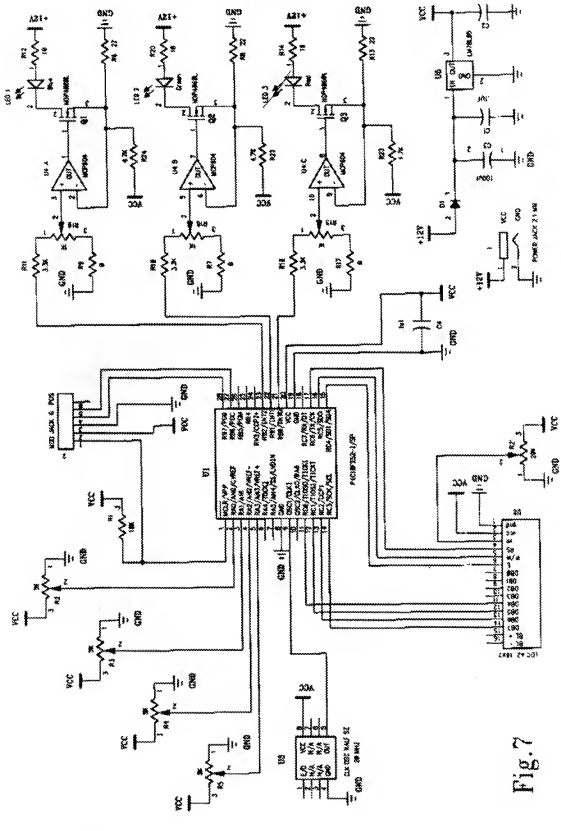

Fig. 7

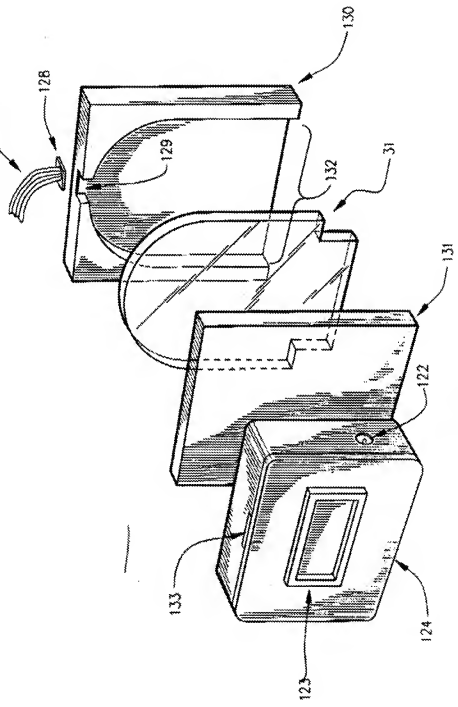

Fig9

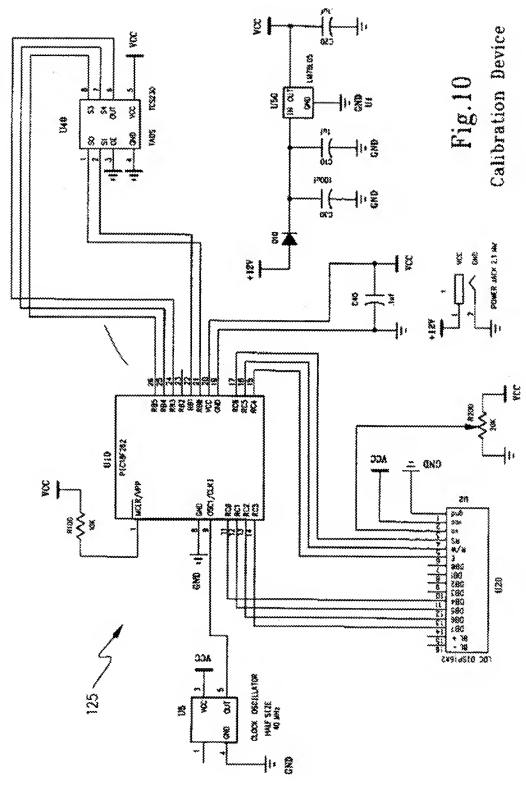

Fig.10
Calibration Device

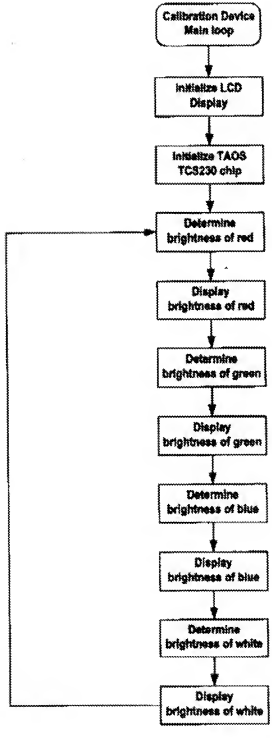

Fig.11
Calibration Device Main Loop

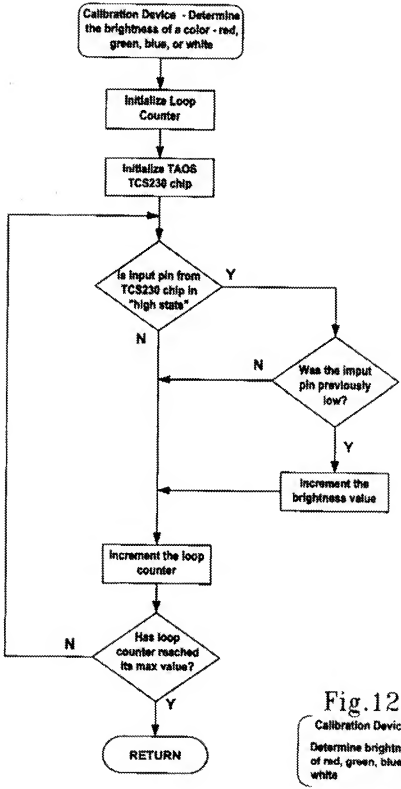
Calibration Device - Determine the brightness of a color - red, green, blue, or white
Initialize Loop Counter
Initialize TAOS TCS230 chip
Is input pin from TCS230 chip in "high state"
Y
N
Was the imput pin previously low?
N
Y
Increment the brightness value
Increment the loop counter
Has loop counter reached its max value?
N
Y
RETURN
Calibration Device
Determine brightness of red, green, blue, or white

Fig.12

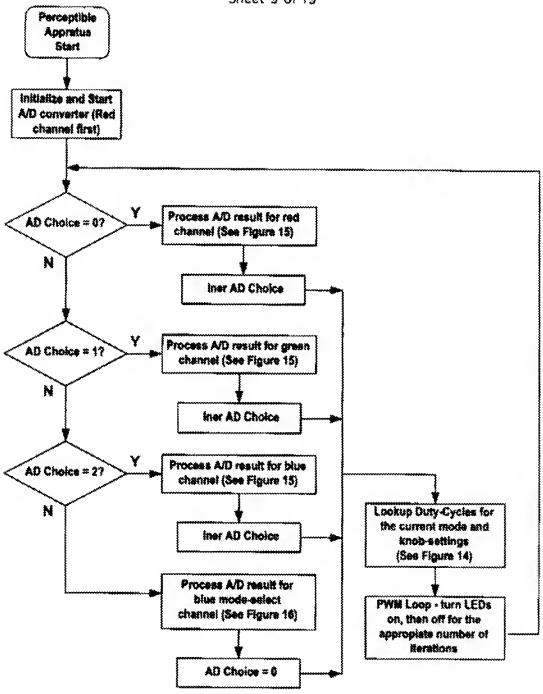

Fig.13

Perceptible Appratus Main Loop

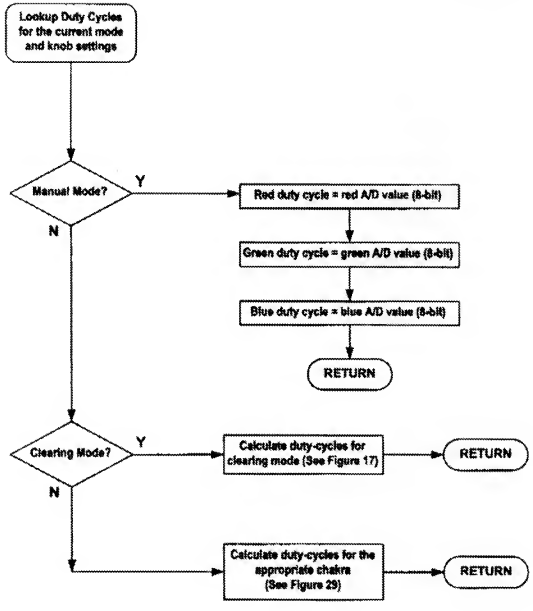

Fig.14

Perceptible Appratus - Lookup Duty cycles based upon current mode and knob settings

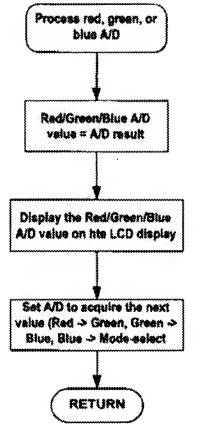

Fig.15

Perceptible Appratus - Process red, green, or blue A/D

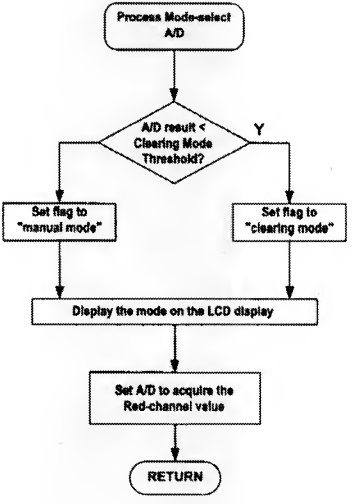

Fig.16

Perceptible Appratus - Process mode-select A/D

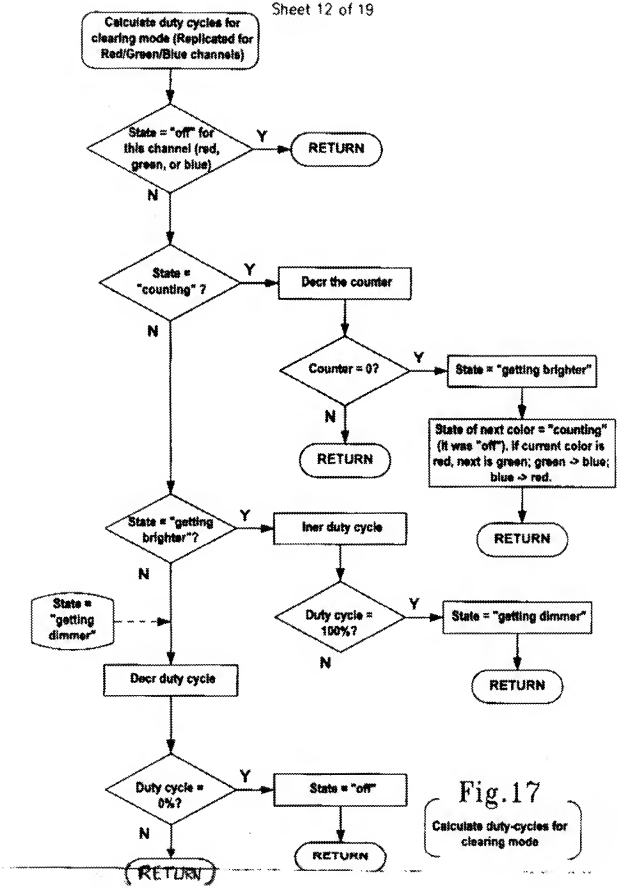

Fig.17

Calculate duty-cycles for clearing mode

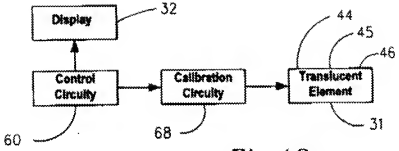

Fig.18

Block Diagram
Energy Machine

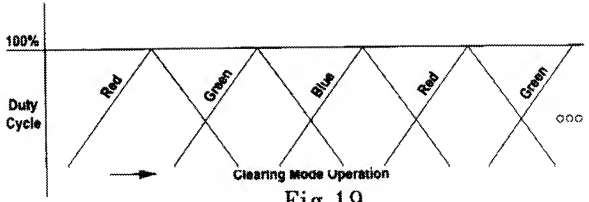

Fig.19



Fig.20

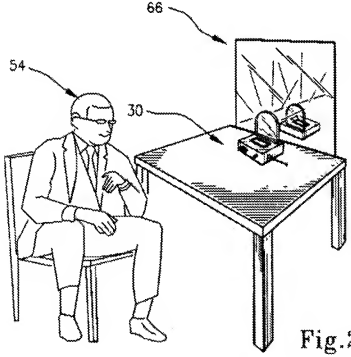

Fig.21

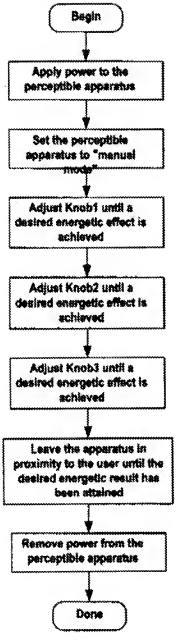

Fig.22

Method of use - Manual Mode (exemplary embodiment of the present invention)

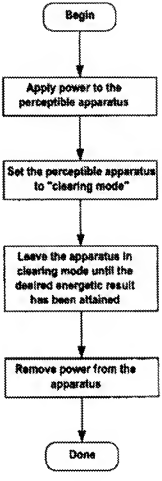

Fig.23

Method of use - Clearing Mode (exemplary embodiment of the present invention)

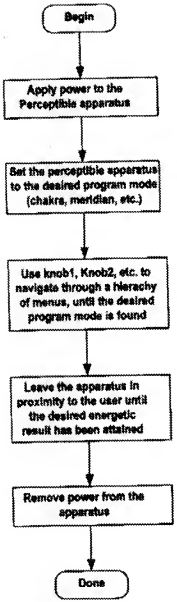

Fig.24

Method of use - Program Mode (exemplary embodiment of the present invention)

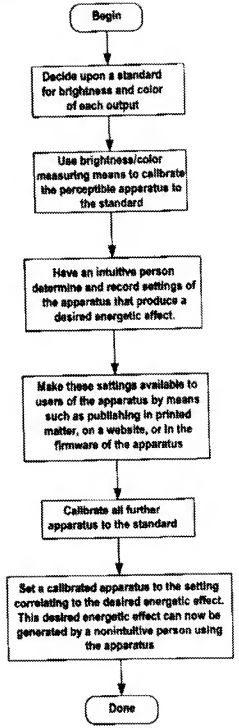

Fig.25

Process for replicating an energetic affect

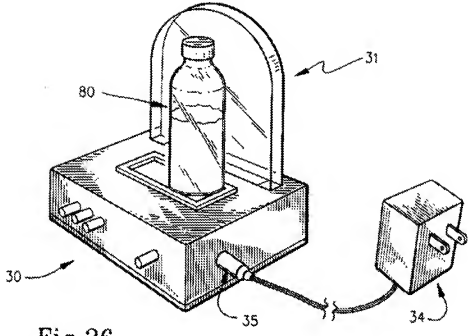

Fig.26

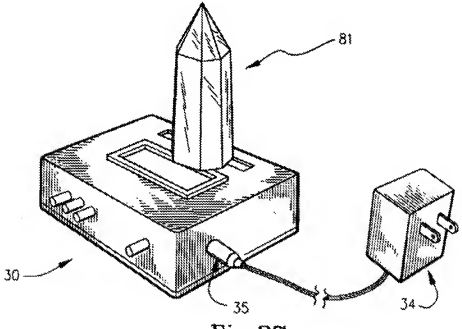

Fig.27

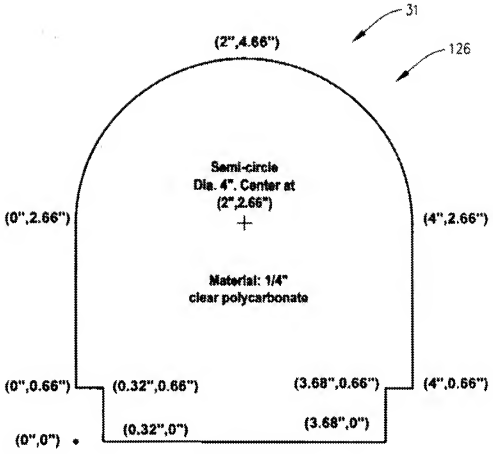

Fig.28

Dimensions of translucent elment 31 used in exemplary embodiment of program mode

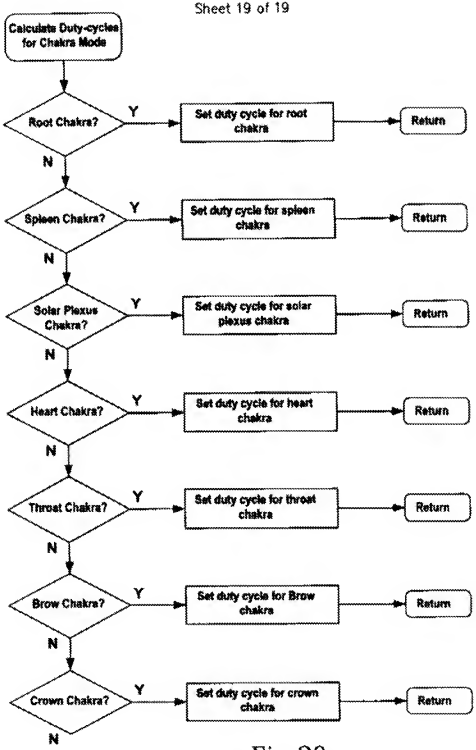

Fig.29

Calculate duty-cycles for chakra mode